

Validation of Ocean Target Detection by the RADARSAT-1 Synthetic Aperture Radar

Chan-Su Yang^{a,*}, In-Young Gong^b, Keyyong Hong^c

Korea Research Institute of Ships and Ocean Engineering / KORDI
171 Jang-Dong, Yuseong-ku, Daejeon, 305-343, Korea
^a yangcs@kriso.re.kr, ^b iygong@kriso.re.kr, ^c kyhong@kriso.re.kr

Abstract –This paper introduces the experimental results of ship detection by both RADARSAT SAR imagery and land-based RADAR data, operated by the local Authority of South Korea, so called vessel traffic system (VTS) radar. Two fine imagery of Ulsan Port were acquired on June 19 and August 6, 2004 and are processed to detect ships automatically. The candidate target positions are compared with in-situ ship validation information collected field experiments. Our analysis for anchoring ships, above 62 m in length, with AIS indicates a 100 % ship detection rate for the RADARSAT single beam modes.

Keywords: RADARSAT, SAR, Ship, VTS, Radar.

1. INTRODUCTION

With the increasing importance in monitoring ship traffic in both coastal and ocean waters, an automatic detection of ships, wakes, and ship velocity is very desirable. By using land-based radar, Vessel Traffic Service (VTS) has been developed and applied in waterways around ports. The control of ships near coasts is currently supported by VTS radar but it is restricted because of available information limitations. In addition to that, the coverage of monitoring ships by the traditional VTS is limited to the bay area or the approach from the sea to a harbour. There is a requirement for improving the VTS to be able to cover areas where radar coverage is almost impossible to achieve.

Yang and Park (2003) suggested an approach merging of satellite remote sensing and environmental stress model to ensure marine safety for the navigational waters off the radar range. RADARSAT has the capability to detect both stationary and moving ships on the ocean. Ships are good microwave reflectors, or hard targets, in a sense acting as radar corner reflectors. They return a large portion of the incident energy back to the SAR sensor and may appear in the SAR imagery as relatively bright points or elongated bright blobs. Due to this strong hard target behavior, the location of fishing fleets can be easily determined using SAR imagery. Successful SAR detection of ships depends, nevertheless, on the size and type of vessel, the prevailing wind speed conditions, the SAR resolution used and the viewing angle [Vachon et al. (1997), Morse and Protheroe (1997), Wackerman (1996)].

A VTS and SAR combination service, therefore, could be an alternative proposal to expand vessel-monitoring

coverage to ocean waters. The objective of this paper is to present the results of field experiment in detecting ships using RADARSAT-1/SAR File mode. There are two fundamentally different ways of detecting ships using the SAR images: detection of the ship target itself and detection of the ship wake. The work presented in this paper focuses on the procedure of detecting ship target itself in Radarsat-1 SAR imagery in a fully automatic way, because stationary ships and slow moving ships have no wakes or wakes are often not visible. VTS-radar data was used to validate the ship position obtained from SAR imagery and to obtain a vessel code.

2. DATA

2.1 SAR Image Data: Fine Mode

RADARSAT-1 satellite SAR data were acquired on June 19 and August 6, 2004 and processed at the Korea Earth Observation

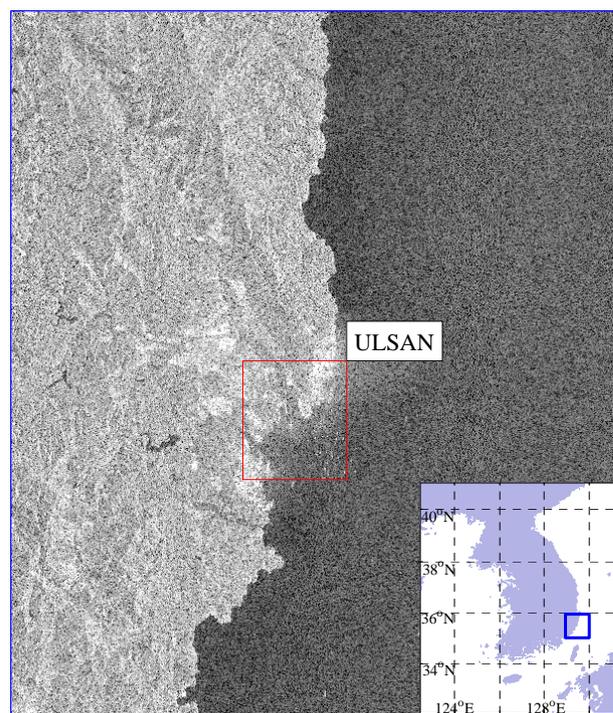


Figure 1. RADARSAT image, Ulsan Bay–centered East Coast of South Korea, June 19, 2004.

* Corresponding author. Tel: +82-42-868-7276, Fax: +82-42-868-7738

Table A. Data Descriptions and Weather Conditions

Specification of RADARSAT SAR	Acquisition Time/Center (LT)	June 19, 2004 06:19:07	August 6, 2004 06:19:01
	Mode	Fine/Descending	Fine/Descending
	Incidence Angle (Deg)	41.21	41.21
Weather Conditions	Wind	2.6-3.2m/s, NW	0-0.4m/s, NW
	Wave	Calm	Calm

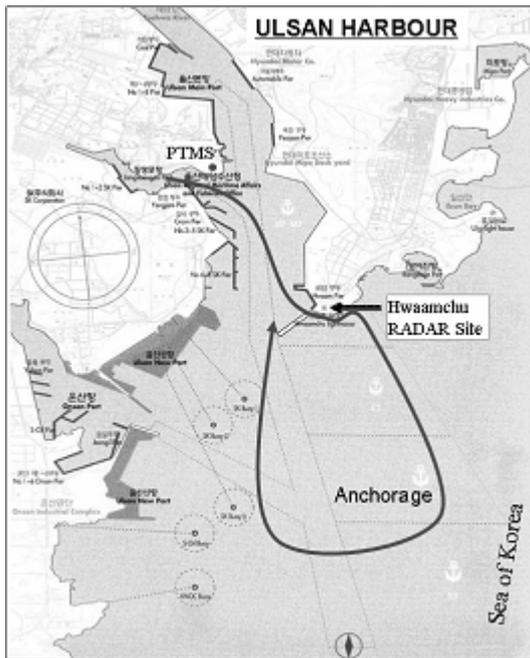


Figure 2. Map of Ulsan Bay. VTS-based ship information and weather data were measured at Hwaamchu site. The bold line represents a trajectory of ship used here.

Center (KEOC) as shown in Fig. 1 and Table A. SAR image is calibrated to geophysical (sigma naught) values of radar cross section (RCS) even if data numbers (DN) on these detected images can be viewed as indicating relative radar backscatter intensities. Wind data was acquired from Hwaamchu station (Fig. 2). During the first SAR data acquisition, northwest winds, with speeds from 2.6 m/s to 3.2 m/s were recorded, and during the second acquisition there was below 0.4 m/s winds.

2.2 Validation Data

Validation data includes ship name, call sign, latitude/longitude position, ship size and type, and ship photographs from the scene.

- Automatic Identification System (AIS) GPS ship position
- Vessel Traffic Service (VTS) data: vessel code, radar image
- ship photographs from the scene

The vessels tracked by the Ulsan-VTS during the SAR acquisition are shown in Figs. 3 and 4, and listed Tables B and C.

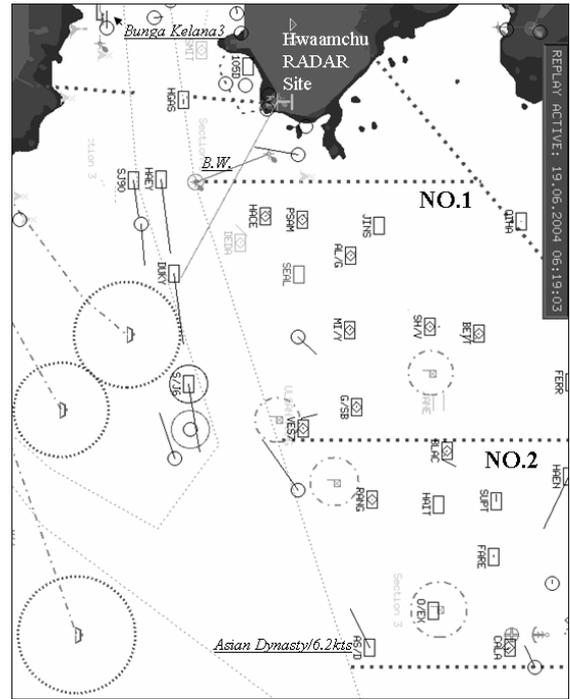


Figure 3. VTS-Radar based ship locations and codes: June 19, 2004

Table B. Ship Information: June 19, 2004

Ship Name	Ship Code (See Fig.3)	Length (LOA, m)	Breadth (m)	Depth (m)	Type of ship
HANYANG ACE	HACE	78	13	7	Petroleum Product Tanker
PACIFIC SAMBU	PSAM	84	14	8	Chemical Tanker
DE DA	DEDA	90	16	8	Towing Tug
ALPHA GAS	AL/G	93	16	7	Liquefied Gas(LPG) Tanker
SEA LINE	SEAL	70	12	6	General Cargo Ship
SUPERTEC	SUPT	185	32	16	General Cargo Ship
HAE NAM	HAEN	60	10	5	Petroleum Product Tanker
ASIAN DYNASTY	AS/D	193	32	20	Car Carrier
BUNGA KELANA 3	<i>Alongside</i>	236	42	21	Oil Tanker

3. SHIP DETECTION ALGORITHM

The proposed structure of the detection algorithm is illustrated in Fig. 5. The principle of the detection algorithm is based on the theoretical considerations and practical experience, and the algorithm use a processing chain consisting of calibration, land masking, thresholding, point positioning, labeling technique, morphological erosion, morphological dilation, morphological bridging, and attribute-extraction.

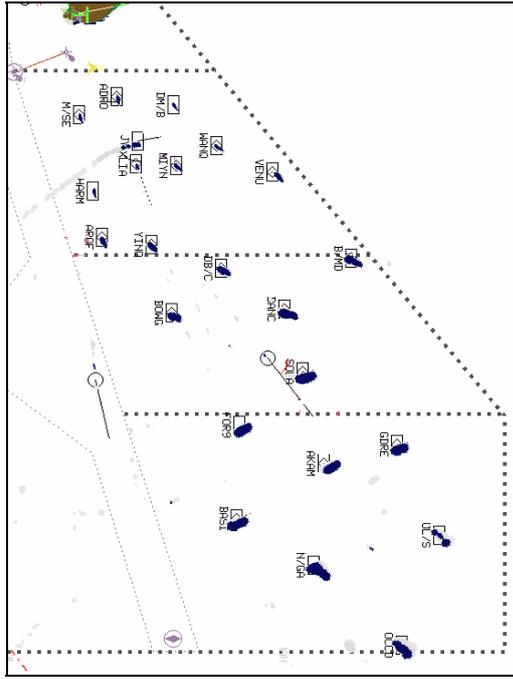


Figure 4. Same as of Fig. 3 for Aug 6, 2004

Table C. Same as of Table B for Aug 6, 2004

Ship Name	Ship Code (See Fig.4)	Length (LOA, m)	Breadth (m)	Depth (m)	Type of ship
Morning Sea	M/SE	79	14	6.7	Chemical Tanker
Harmony	HARM	68	11.6	5.7	General Cargo
Ocean Concord	OCCD	237	42	19.5	Petroleum Product
Navios Galaxy	N/GA	216	32.2	19.3	General Cargo
Akama	AKAM	174	32.2	19.1	Petroleum Product
Global Dream	GDRE	154	26	11	General Cargo Ship
Solar Oceania	Sola	162	27.2	13.4	General Cargo Ship
Formosa Nine	FOR9	167	30	14.2	Chemical Tanker
Danchi	DANC	171	32	14	Petroleum Product
Bunga Melati Dua	B/MD	168	30	15	Petroleum Product
DB Coral	DB/C	111	19.5	10.2	Chemical Tanker
Wanquanhai	WANQ	96	15.2	8.4	Petroleum Product
Venus Gas	VENU	84	15	7	Liquefied Gas(LPG)
Mi Yeon	MIYN	92	14.6	7.4	Petroleum Product
Basic Arron	BASI	182	32.2	16.5	General Cargo
Dongmyung Best	DM/B	73	13.6	7.7	General Cargo
Xin Liang	XLIA	85	16.2	7.2	General Cargo
Adoracion	ADRO	78	12.8	5.8	Chemical Gas
Pacific Crystal	P/CR	312	58	29.5	Crude Oil
Fine Hana	FH	62	10	4.5	Petroleum Product
Ju Yeon	JY	98	15.2	7.5	Petroleum Product
Yinquan	YINQ	105	16.4	7.8	Petroleum Product

The proposed structure of the detection algorithm is illustrated in Figure 5.

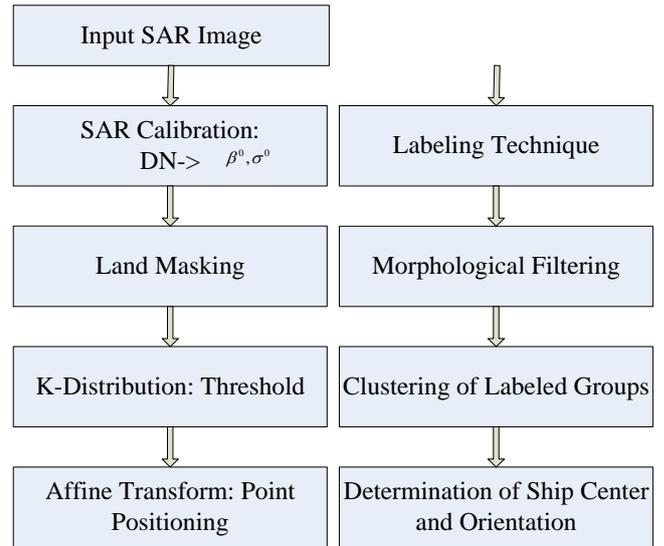


Figure 5. Flowchart of the proposed algorithm



Figure 6. RADARSAT Fine mode image: Aug 6, 2004

4. VALIDATION RESULTS

4.1 Case Study 1: Aug 6, 2004

Vessels at anchorage No. 1 and No.2 as shown in Fig. 3 are identified in SAR image (Fig.6). Breakwater (B.W. in Fig. 3) is also not seen in the image, but the two lighthouses at each end of the breakwater appear as a bright dot.

Figure 7 shows a interpretation example of an extracted region containing a vessel signature.

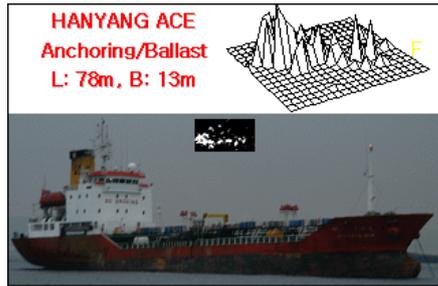


Figure 7. Vessel classification by RADARSAT Fine mode image: Petroleum Product Tanker. Upper left represents a vessel information for the photo in the bottom, and top-right figure is a contour plot for a beta nought.

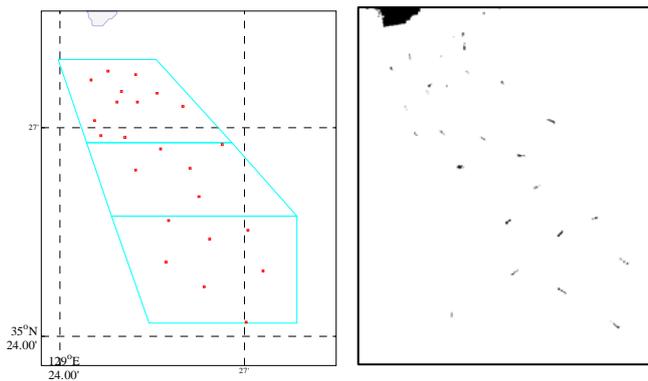


Figure 8. 23 vessels in anchorage from AIS positions (left) and RADARSAT candidate target positions (right): Aug 6, 2004.

4.2 Case Study 2: June 19, 2004

The validation process is straightforward, requiring comparison of ship validation positions with RADARSAT candidate target positions. As a validation data, 23 vessels in anchorage were selected, because their positions show hardly variation with time and are reported to VTS center using AIS. Figure 8 represents the locations of 23 vessels and RADARSAT-detected ship targets. Figure 9 is the superposition of the ship targets transmitted by AIS to VTS center (Fig. 8 left image) and the potential ship targets identified by SAR imagery. The SAR data detected all targets that were reported to VTS. In a portion of ships, a large discrepancy in position appears, but that is why the SAR-ship position is calculated as a centroid of potential ship area, and an AIS transmitter is installed on bridge.

5. CONCLUDING REMARKS

In this paper, we introduced a ship detection technique and its validation result. The main advantage of the method is that the difference of light intensities between a ship and the sea can be obtained quickly and automatically without human intervention. Two fine imagery of Ulsan Port under calm condition were used to detect stationary ships at anchorage and reveals 100% accuracy for merchant vessels with a variety of types.

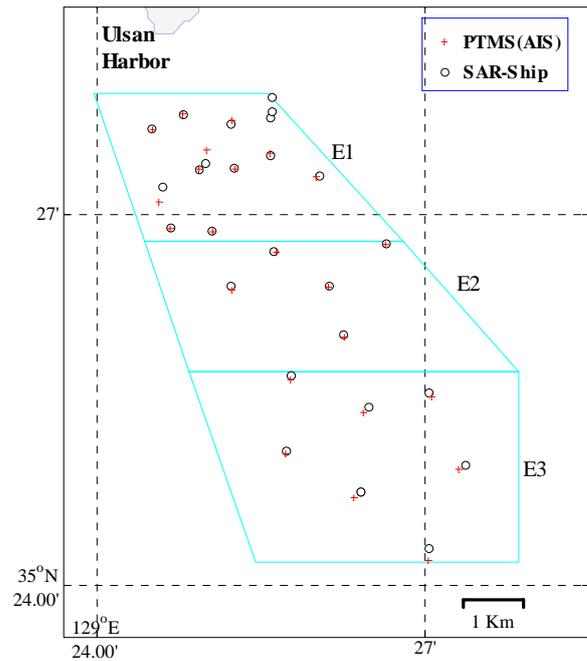


Figure 9. Collocated RADARSAT and AIS(VTS) targets.

6. ACKNOWLEDGEMENTS

This work was supported by the Basic Research Project, "Development of Safety Evaluation Technologies for Marine Structures in Disastrous Ocean Waves", the Public Benefit Project of Remote Sensing, "Risk Map of Marine Accidents Based on Satellite Data" of Korea Aerospace Research Institute and the national specific research and development project, "Development of Marine Traffic Safety Information System and Oil Spill Monitoring System based on Artificial Satellite" of the Ministry of Science & Technology. The author wishes to thank Capt. Jae-Do Lee for his help in arranging a ship.

6. REFERENCES

- [1] Yang, C.S. and Park, Y.S., Merging of satellite remote sensing and environmental stress model for ensuring marine safety. *Intl. J. Navigation and Port Research*, 27(6), pp. 645-652, 2003.
- [2] Morse, A.J. and Protheroe, M.A., Vessel classification as part of an automated vessel traffic monitoring system using SAR data. *Intl. J. Rem. Sensing*, 18(13), pp. 2709-2712, 1997.
- [3] Vachon, P., Campbell, J., Bjerkelund, C., Dobson, F., and Rey, M., Validation of Ship detection by the RADARSAT SAR, *Proceedings PORSEC'96*, Victoria, Canada, 1996.
- [4] Vachon, P.W., Campbell, J., Bjerkelund, C., Dobson, F., and Rey, M., Ship Detection by the RADARSAT SAR: Validation of Detection Model Predictions, *Canadian Journal of Remote Sensing*, 23(1), pp. 48-59, 1997.
- [5] Wackerman, C., An algorithm for automatically detecting and characterizing Kelvin wakes in SAR imagery. *ERIM Report 606131-1-X*, August 1996, Ann Arbor, 1996.