

# APPLICATION OF GEOMATICS IN PHOTOVOLTAICS

J. Beseničar<sup>a,\*</sup>, Boris Trstenjak<sup>b</sup>, D. Setnika<sup>c</sup>

<sup>a</sup>IGC, Slovenia - besenicar.jure@siol.net

<sup>b</sup>ERC – ENERGETIKA d.o.o., Stanetova 27, Celje, Slovenia - boris.trstenjak@erc-energetika.si

<sup>c</sup>Geodetski zavod Celje, d.o.o., Ul. XIV. Divizije 10, Celje, Slovenia - dusan.setnikar@gz-ce.si

Commission IV/1, WgS

**KEY WORDS:** Climate, Environment, Application, GIS, Three-Dimensional System, Solar Energy, Photovoltaic

## ABSTRACT:

The United Nations climate report discloses that saving the climate is to make greater use of renewable energy resources. On the top of this list are photovoltaic systems generating the power from sunlight reliably and without any impact on the environment. To optimally exploit these advantages the photovoltaic systems must be properly located and oriented in the environment to meet the required specifications (insulation time, area orientation, legislation data, static and/or dynamic power network etc.). To economically justify the use of the photovoltaic systems the geomatic was applied in the decision making process. Slovenia has in last 15 years systematically built up the system of national geoinformation infrastructure which is widely used in governmental and private sector for different thematic and project oriented applications. This contribution would like to show the application of the standard national geomatic infrastructure data base in the photovoltaic domain. The use of the data bases such as insulation, digital elevation model, digital orthophoto, land cadastre and land register, cadastre of buildings, cadastre of public infrastructure facilities and environmental spatial protection plans is described in detail indicating their role in the optimization process. The entire process is supported with practical examples including the technical and economical components.

## 1. PREFACE

### 1.1 Solar energy

The solar illumination radiation of Slovenia was elaborated by the quasi-global radiation model. Solar energy depends on the incidence angle (astronomical and terrain conditions) and on the duration of solar radiation. The annual global and quasi-global radiation energy was calculated as the sum of all energies over all decades. (Figure 1)

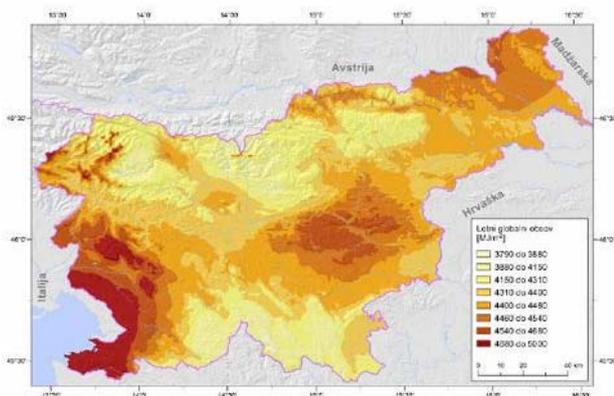


Figure 1. Energy of annual global radiation in Slovenia

### 1.2 Photovoltaics

Photovoltaics is a solar power technology that uses solar cells or solar photovoltaic arrays to convert sunlight directly into electricity. Photovoltaics is also the field of study relating to

this technology and there are many organizations devoted to work on photovoltaics. The manufacture of photovoltaic cells has expanded dramatically in recent years. Mostly the installations are grid-tied, ground-mounted or building-integrated. (Figure 2)



Figure 2. Ground-mounted and building-integrated photovoltaic arrays

### 1.3 Geomatics infrastructure

In last 15 Years Slovenia has build up numerous geoinformation infrastructure databases ranging from property registers, technical infrastructure databases and various registers to support the management of the real estates. The entire geoinfrastructure follows international standards and is

\* Corresponding author.

governmentally owned. Figure 3 shows few examples of geomatic databases.

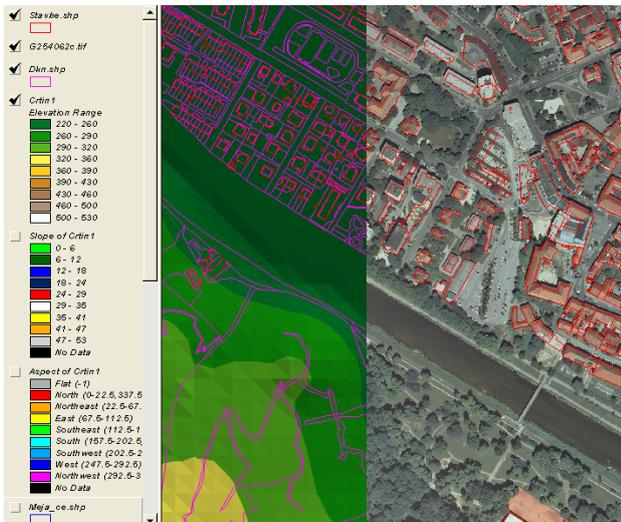


Figure 3. Land cadastre, cadastre of buildings, digital terrain model and its optional derivatives (slope inclination and orientation), DOF

## 2. LEGAL BASICS

The basics for the realisation of entire European Union climate-energy package of measures (worth 60 billion €) are action programmes which have to be ratified by national parliaments. In this context Slovenia will have to increase the part of renewable energy resources by 2022 from 16% to 25%. This way European Union will decrease the external dependence from oil and gas and essentially increase energy security.

One of the most important alternative sources of energy is photovoltaic which essentially contributes to friendly European environment.

## 3. PROBLEM DEFINITION

In order to identify the necessary geoinfrastructure databases, the entire process of operational photovoltaics had to be defined. The process comprises 2 steps. In the first run the estimation of the entire technical feasibility and economical investment are elaborated.

If the estimation is positive then the second run is realised which brings the project to the operational production of electrical power.

This paper has the intention to show how the geomatics is used in the first run in order to produce reliable technical and economical results for later actual execution of the project. The following abbreviations are used in the process diagram for the geo databases:

- solar illumination radiation – SIR
- land cadastre and land register – LCLR
- cadastre of buildings and land register – CBLR
- environment protection plan – EPP
- public infrastructure – PI

- digital terrain model – DTM
- digital orthophoto - DOF
- topographic data / buildings - TDB

Figure 4 shows the process diagram of the photovoltaic project and identification of the geomatic databases.

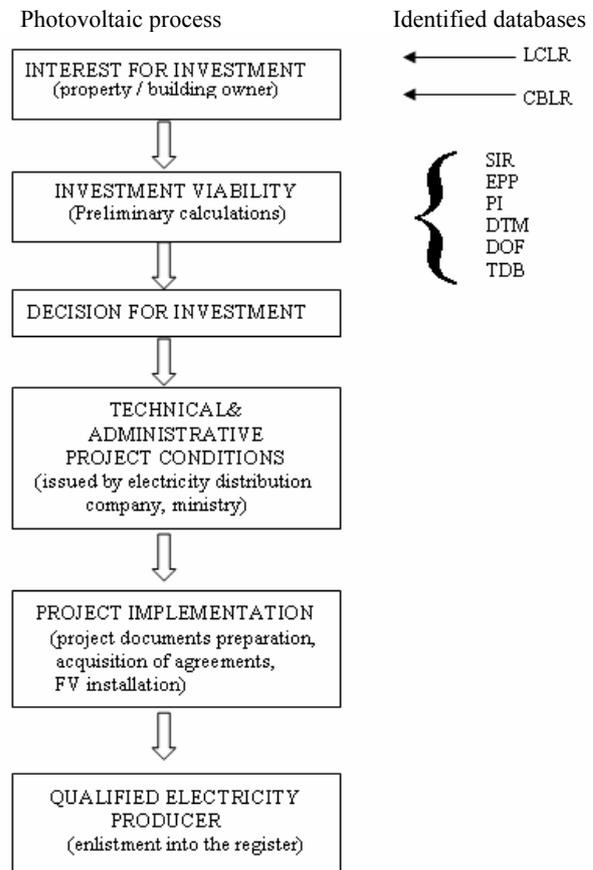


Figure 4. Photovoltaic process and geomatic databases

## 4. DETERMINATION OF COMPONENTS

### 4.1. Determination of the object

The object under consideration is determined either from land cadastre or from cadastre of buildings with necessary attributes. The ownership is identified from land register.

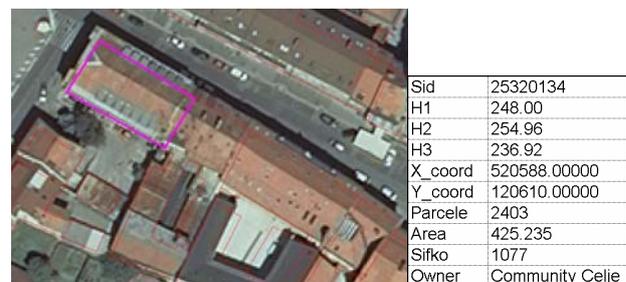


Figure 5. Determination of the object (cadastre of buildings with DOF, selected attributes from cadastre of buildings and land register)

### 4.2. Determination of the solar radiation

The solar radiation is determined from the solar radiation database. Solar radiation is determined in MJ/m<sup>2</sup>/year. It depends on the location of the object in the particular radiation zone. Medium values for those 4 zones are varying from 3700 to 4500 MJ.

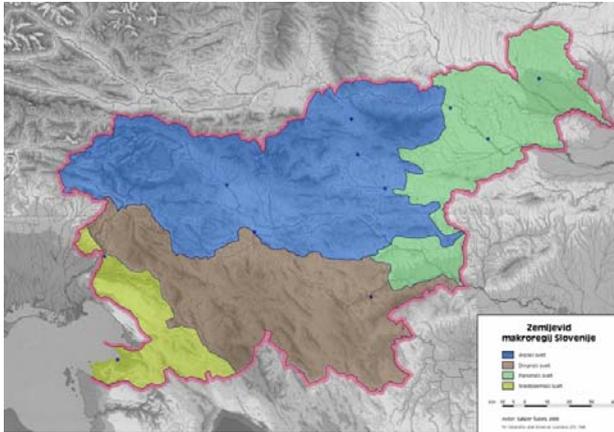


Figure 6. Solar determination radiation regions (alpine, dinaric mountain, panonian basin and Mediterranean region),

### 4.3. Area of the object

In case of the parcel, the area is determined directly from land cadastre. If the object is building the area of the roof is determined directly from cadastre of buildings or by counting the pixels (0,5m x 0,5m) in digital orthophoto. In both cases the area has to be corrected by the inclination factor.

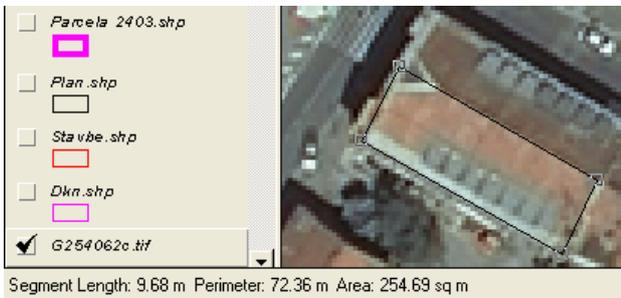


Figure 7. Area determination

### 4.3. Azimuth

Azimuth determination for parcels is determined by digital slopes orientation database.

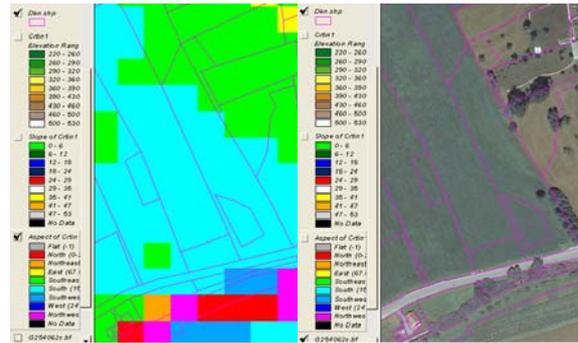


Figure 8. Azimuth determination for parcel

The azimuth of the roof can be determined through computation based on the measured coordinates of the relevant points on the roof. Due to simplicity the azimuth in the operational photovoltaic system is defined just by overlaying a compass based diagram on the displayed object. The reading is recorded manually.

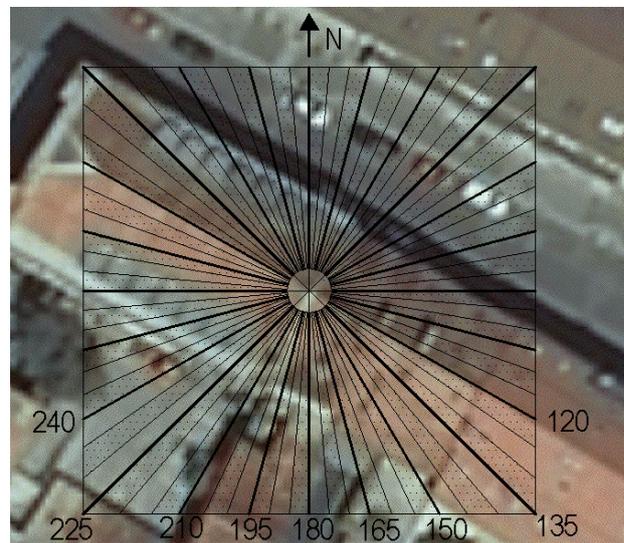


Figure 9. Azimuth determination for object

### 4.4. Inclination

Inclination of the roof is determined by using formula

$$tg \alpha = \frac{b}{a}$$

where  $b$  = roof height obtained from the cadastre of buildings  
 $a$  = horizontal component of a steep, measured from DOF




Figure 10. Inclination determination

#### 4.5. Determination of solar energy for the object

To properly estimate the effect of inclination angle and azimuth the relevant diagram was generated for northern latitude of 45 degrees. The diagram defines the approximate percentage areas of solar energy in dependence of inclination and azimuth.

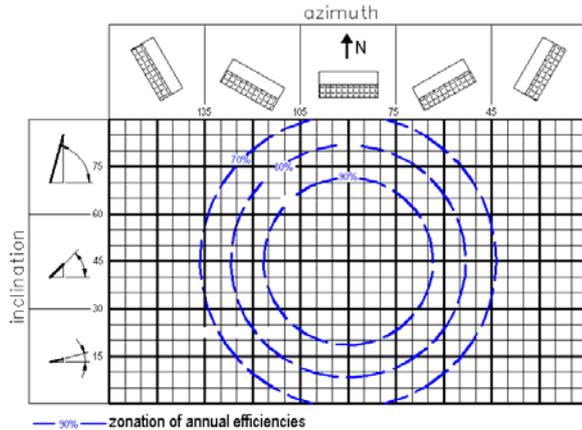


Figure 10. Solar energy as the function of inclination and azimuth

Now, the total solar energy on the object can be computed as follows:

$$SE_{total} = SE \cdot Area \cdot IA$$

where  $SE_{total}$  = Total solar energy [KW/day]  
 $SE$  = Solar energy in Slovenian zone [KW/m<sup>2</sup> /day]  
 $Area$  = area of the object [m<sup>2</sup>]  
 $IA$  = Solar energy as the function of inclination and azimuth [%]

With determined  $SE_{total}$  it is now possible to estimate the economic viability of the potential solar power plant. If the result is positive further computations take place regarding technicalities of the entire project. If, again, the results are positive the actual elaboration of solar power plant takes place having all necessary economic, legal and technical implications.

#### 5. SYSTEM OPERATIONALITY

The main goal of this project was to equip the photovoltaic engineers with fast and reliable tool to estimate the economically viable conditions for potential solar power exploitation. More detailed computations are made during project documents preparation. Therefore the operations are kept as simple as possible allowing effective relevant computations (the entire process requires at max 10 minutes). On the other hand the geoinformation infrastructure proves to be extremely usable especially in the domain of time and costs savings.

#### 6. FUTURE DEVELOPMENTS AND RECOMMENDATIONS

It must be emphasized that the described application of the geomatics is one of many being already operational. These are ranging from communities to enterprises management, support to water and energy supply, environment protection and many others. But as the rule of thumb we have to bear in mind that potential applications will only be successful if the user processes are clearly defined allowing optimal use of geomatics.

#### LITERATURE

Zaksek, K., Oštir K., Podobnikar T, 2003. Solar illumination radiation of Slovenia. *Geodetski vestnik* 47/2003 (1&2), pp. 55-63.